

# TECHNICAL DATA SHEET


## DESCRIPTION

When looking for performance combined with the intention to respect the environment, look no farther than our innovative Lead series. Made of recycled non-woven synthetic fibres, these underlays were specially designed for double-glued down engineered wood flooring.

## COMPATIBILITY

**ADHESIVE**  
AD-844 MS  
AD-532+

**FLOORING**  
Engineered wood floor

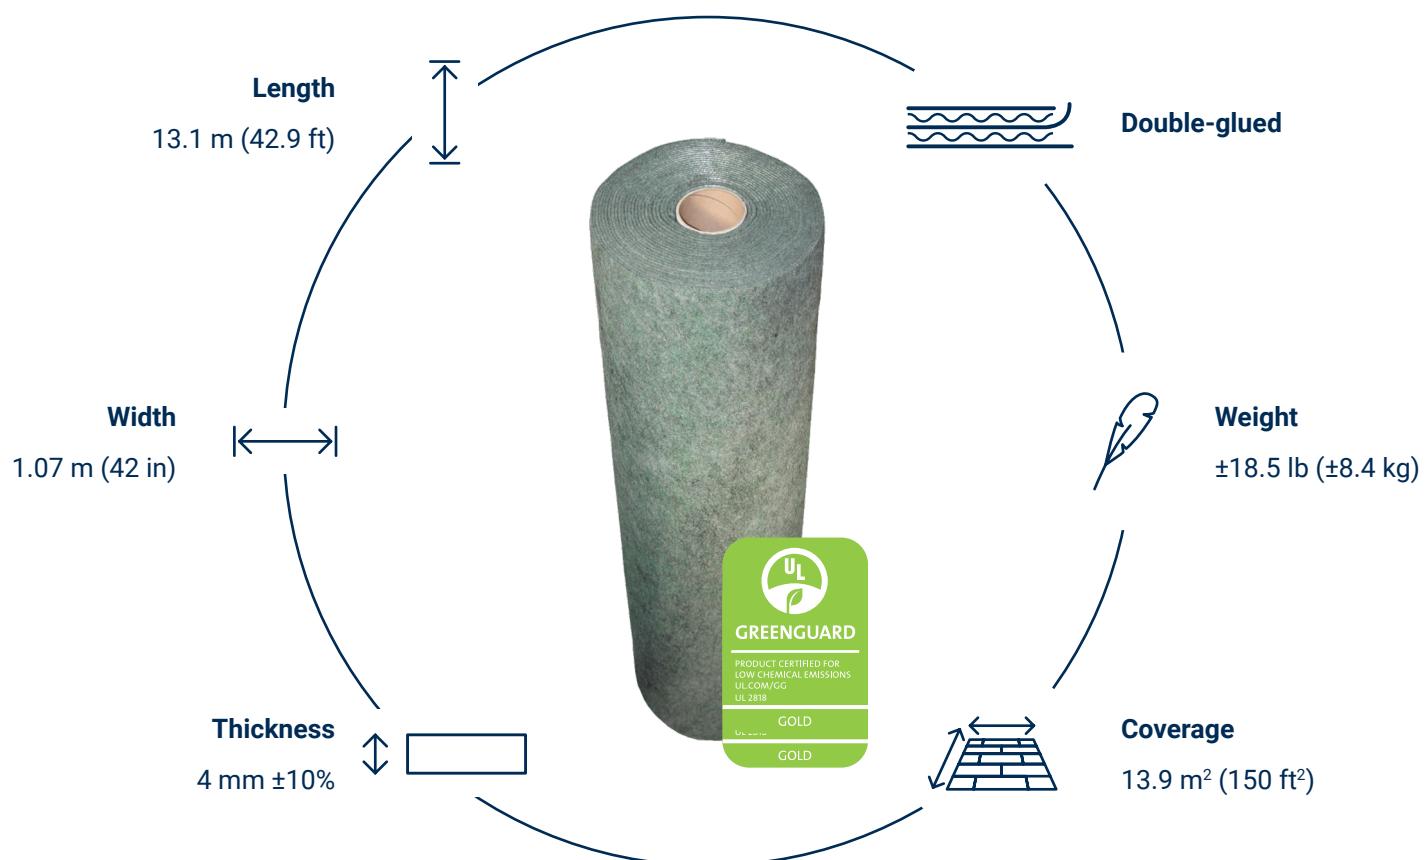

# TECHNICAL DATA SHEET

## PERFORMANCE TABLE

Test	Suspended ceiling	Structure	Flooring type	Installation	Acoustic performance	Acoustic comfort
T.71.5	Yes	Concrete 9"	Engineered	Double-glued	AIIC: 72	A-HIIC 74
T.150.4	Yes	Hollowcore 8"	Engineered	Double-glued	AIIC: 60	A-HIIC: 62

## PHYSICAL PROPERTIES

Type of fibre	Needle-punched recycled polyester
Type of film	Needle-punched recycled polyester
VOC	0 g/L
Moisture	Rot-resistant
Flammability	1 (National Fire Protection Association. NFPA)
Length	13.1 m (42.9 ft)
Width	1.07 m (42 in)
Thickness	4 mm ±10%
Weight	±18.5 lb (±8.4 kg)
Coverage	13.9 m <sup>2</sup> (150 ft <sup>2</sup> )

## TECHNICAL DATA

PERM (vapor barrier) ASTM E96	N/A
R factor ASTM C518	0.512
R factor of the assembly ASTM C518	1.390 without floor covering
Robinson ASTM C-267	N/A
Grab tensile strength CAN-148.1 - no 7.3	1250 N ±5%
Grab tensile elongation CAN-148.1 - no 7.3	75% to 120%
"Mullen" bursting CAN-4.2 - no 11.1	3050 kPa ±5%
Trapazoidal tear CAN-4.2 - no 12.1	525 N ±5%
Reflectivity	70%



IRREGULAR AIR CELLS

INSTALLATION WITH  
ENGINEERED FLOORING

LIGHT



NO VOC



EASY TO INSTALL



EASY TO GLUE

COMPATIBLE WITH  
HEATED FLOORS